


Industrial Gases

Ultramat™ UFM-D30 (HP) / UFM-D130 Condensate drain without compressed air loss

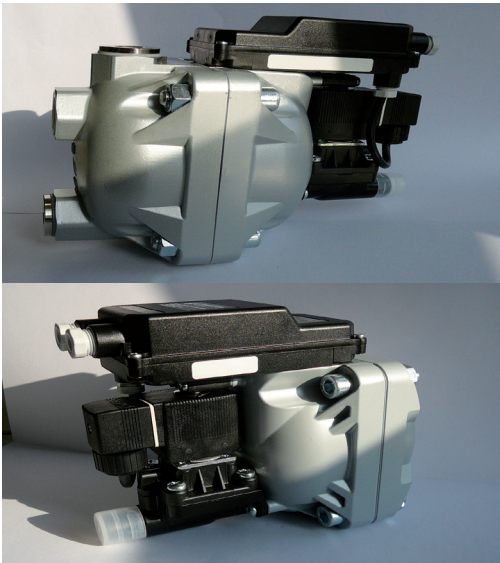

Condensate drain without compressed air loss

MAIN FEATURES & BENEFITS:

- Electronically, level-controlled condensate drain without pressure losses
- Permanent function control via LED display, automatic emergency programs in the alarm mode
- Easy maintenance, small inclination to emulsification, small noise during draining procedure, insensitive to dirt.
- Aluminium corrosion-resistant, glass-fiber reinforced plastics, steadily against oil-contaminated and oil-free condensate

PRODUCT DESCRIPTION


The UFM-D's are compressed air zero-loss, electronically controlled condensate drains. The large internal cross-sections for draining ensure reliable operation even when dealing with dirty, particle polluted condensate: Less downtime, less trouble and more safety for the application- especially in direct comparison with time- or float controlled drains.

Additionally the condensate becomes less emulsified – when compared with time controlled solenoid valves. Less emulsification and better function of oil/ water separators: longer compliance with legal discharge limits, less running costs.

As there is no air-loss whilst purging these drains work silent – a very important feature when this drain is installed within a working area.

The electronic control of the drain monitors the proper operation continuously. Automatic malfunction routines and a potential free contact for remote control ensures safe operation at all times. You can react to malfunctions before they are obvious by condensate water in the compressed air line at the point of use.

INDUSTRIES:



- Chemical and pharmaceutical industry



- Electronic industry



- Surface finishing



- Industrial machinery



- Energy

PRODUCT DESCRIPTION

Typical applications for the condensate drains UFM-D30 - UFM-D130 are:

Compressed air zero-loss draining of condensate at:

- Compressors
- Aftercoolers
- Reciever-vessels
- Pre- and after-filters of fridge dryers
- Pre-filters of adsorbtion dryers
- Condensate- and oil-removal filters
- Pipe bends



PRODUCT SPECIFICATIONS

Features:	Benefits:
Electronically level-controlled	No expensive compressed air losses, condensate drain depending upon resulting condensate amount, sensor detects each kind of condensate (also pure oil), also in case of strong contamination the draining works problem-free
Electronic control	Permanent function control via LED display, automatic emergency programs in the alarm mode, potential-free alarm contact function test via test button
Generously dimensioned cross sections	Easy maintenance, small inclination to emulsification, small noise during draining procedure, insensitive to dirt
Materials corrosion resistant	Aluminium corrosion-resistant, glass-fiber reinforced plastics steadily against oil-contaminated and oil-free condensate (special equipments for particularly aggressive condensate available)
Condensate inlet vertically or horizontal	Flexible and easy montage on different pipings possible



PRODUCT SPECIFICATIONS

Technical Data	D30	D30HP	D130
min./max. Operating pressure	0.8- 16 bar (12-230 psi)	0.8- 40 bar (12-580 psi)	0.8- 16 bar (12-230 psi)
min./max. Temperature	+1°C- +65°C (+34°F- +149°F)		
Condensate inlet	2x G 1/2 (1/2")		3 x G 3/4 (3/4")
Condensate outlet	G 1/2- a (di = 13 mm / 1/2")	G 3/8" - i	G 1/2- a (di = 13 mm / 1/2")
Condensate	oil contaminated + oil free		
Weight (empty)	2.0 kg (4.4 lbs)		2.9 kg (6.4 lbs)
max. Compressor performance ¹⁾	30 m ³ /min (1.060 scfm)		130 m ³ /min (4.590)
max. Fridge dryer performance ¹⁾	60 m ³ /min (2.120 scfm)		260 m ³ /min (9.180 scfm)
max. Filter performance ¹⁾	300 m ³ /min (10.600 scfm)		1300 m ³ /min (45.900 scfm)
Supply voltage (See type plate)	230 / 115 ± 10%, 50-60 Hz / 24 VDC ± 10% ¹		
Power consumption	P < 8.0 VA (W)		
Recommended cable-jacket diameter	Ø 5.8- 8.5 mm (0.23" - 0.34")		
Recommended wire cross-section	3x 0.75-1.5 mm ² / 5 x 0.25 mm ²		
Recommended fusing	0.5 A medium-term (AC) / 100 mA medium-term (DC)		
Protection class	IP 65		
Potential free contact			
Connection data	AC: < 250 V / < 1A DC: > 5 V / > 10 mA		
Exclusion from the scope of application			
Not suitable for:	CO ₂ plants		


¹⁾ Max. performance for ambient temperature 20°C. 50% r. h.

MATERIALS/ DIMENSIONS

Materials:
Housing: Aluminium, KTL coated
Options:
Heater: 24V; 115 V; 230 V
Insulation cover
Bracket

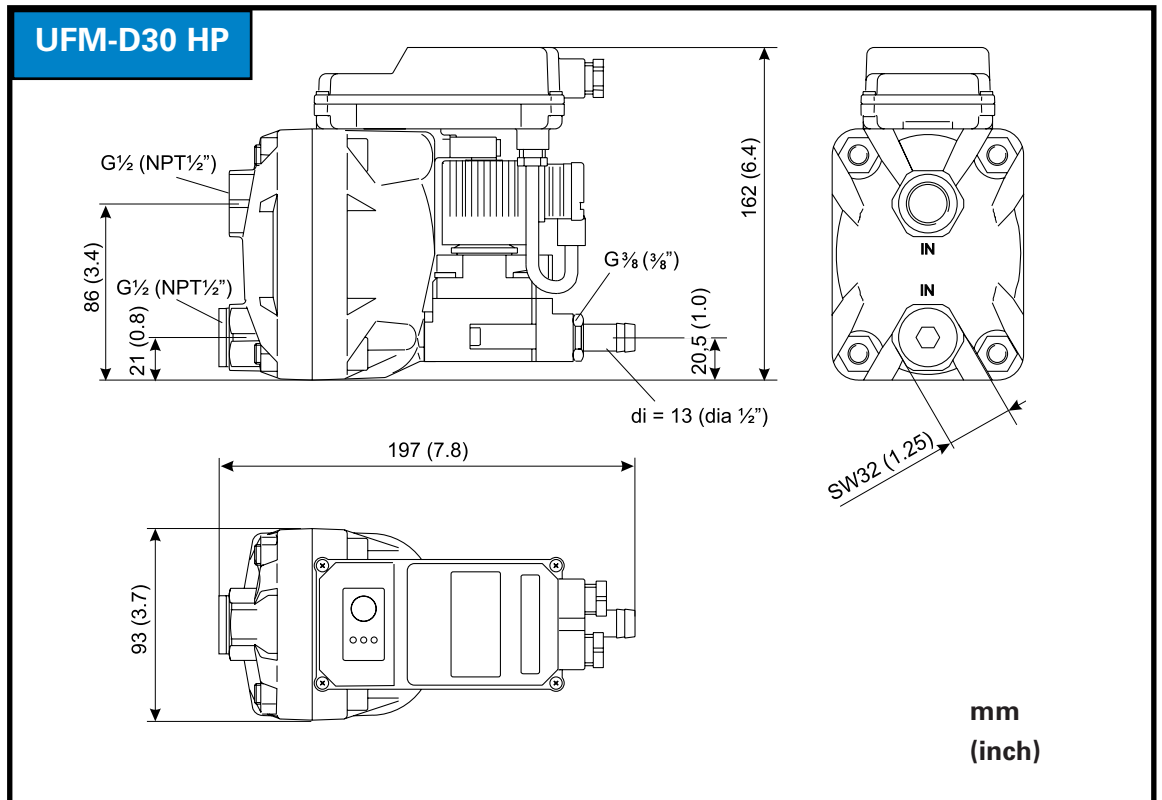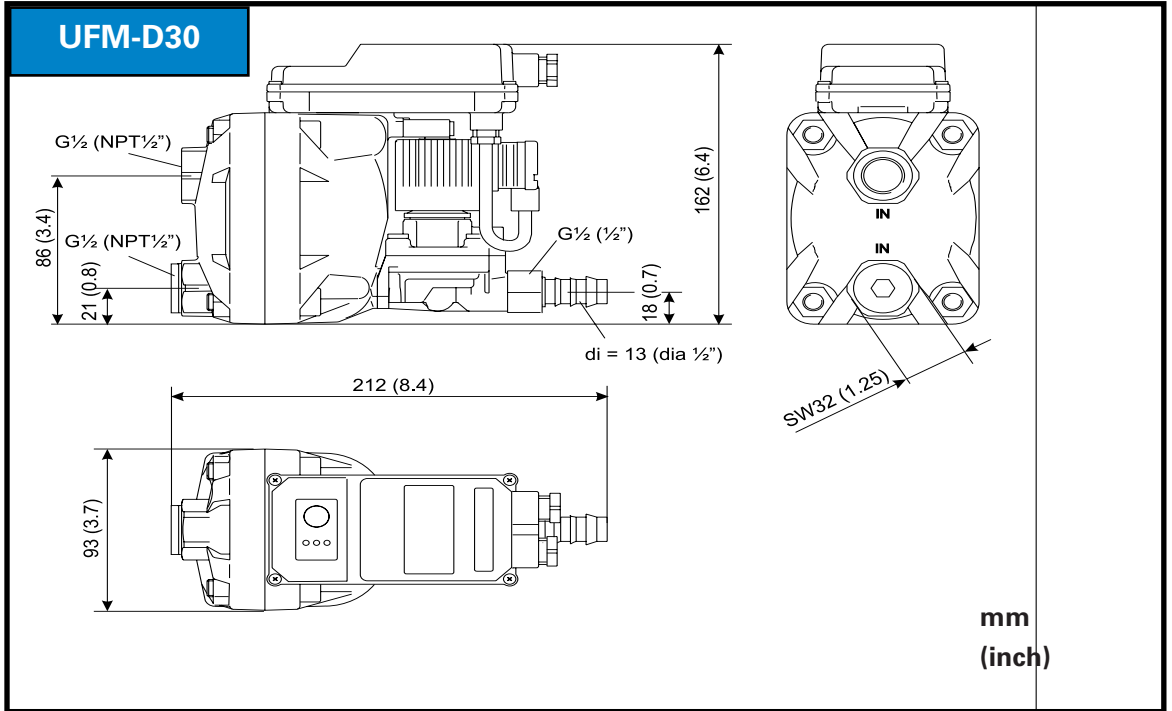

Materials:
Housing: Aluminium, KTL coated
Options:
Heater: 24V; 115 V; 230 V
Insulation cover
Bracket

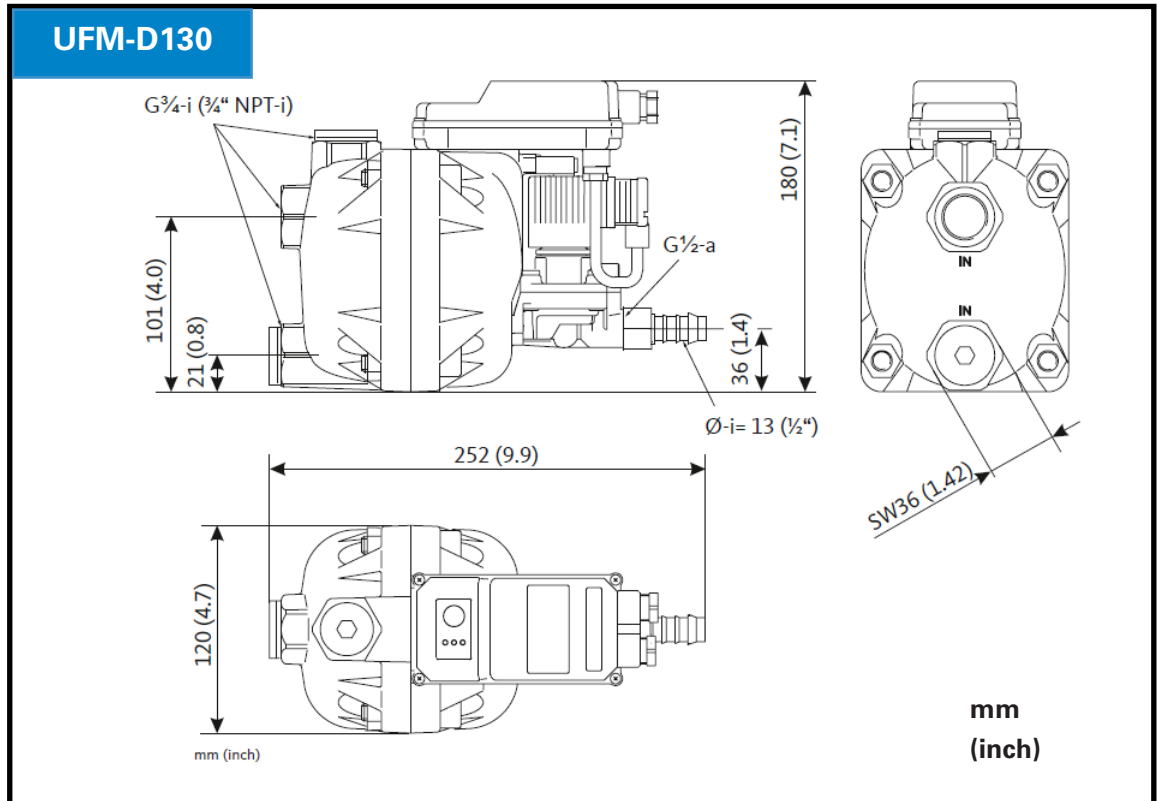

For more information please contact your Donaldson Sales Representative and visit our website at www.donaldson.com.



Explore our solutions
at shop.donaldson.com

Contact us

Donaldson Europe BV
Research Park No. 1303, Interleuvenlaan, 1
B-3001 Leuven, Belgium
Telephone: +32 (0) 16 38 38 11



Technical Data Sheet No. F119057 EN (11/25) UFM-D Condensate drain without compressed air loss
©2025 Donaldson Company, Inc. Donaldson, Ultramat and the color blue are marks of Donaldson Company, Inc.
All other marks belong to their respective owners. All rights reserved.

Important Notice: Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.